
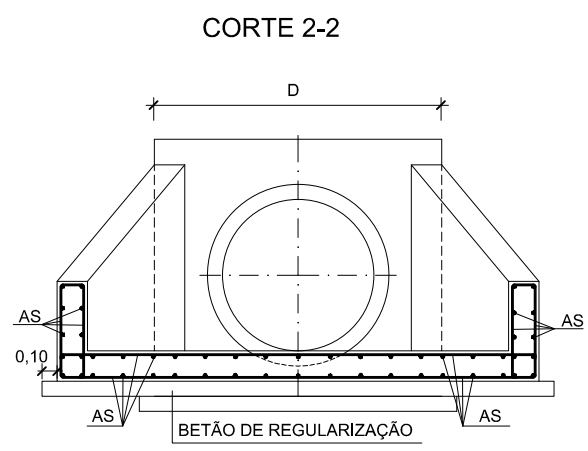
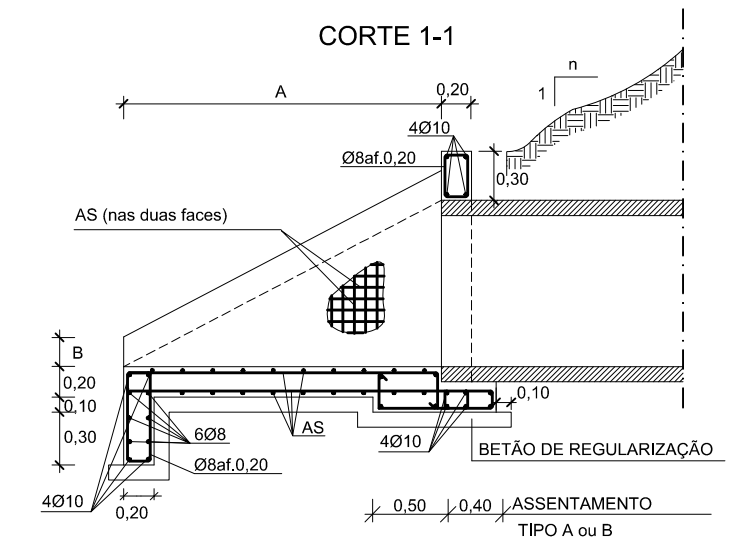
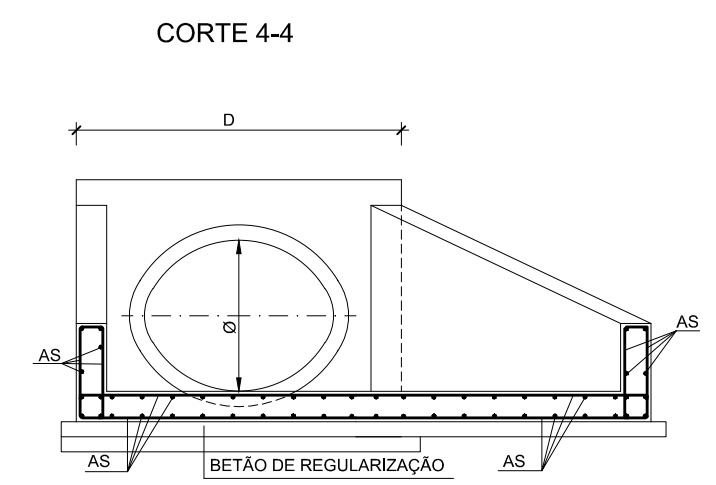
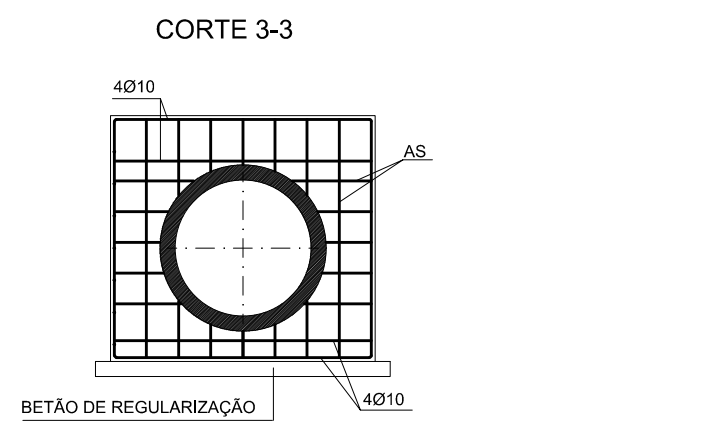
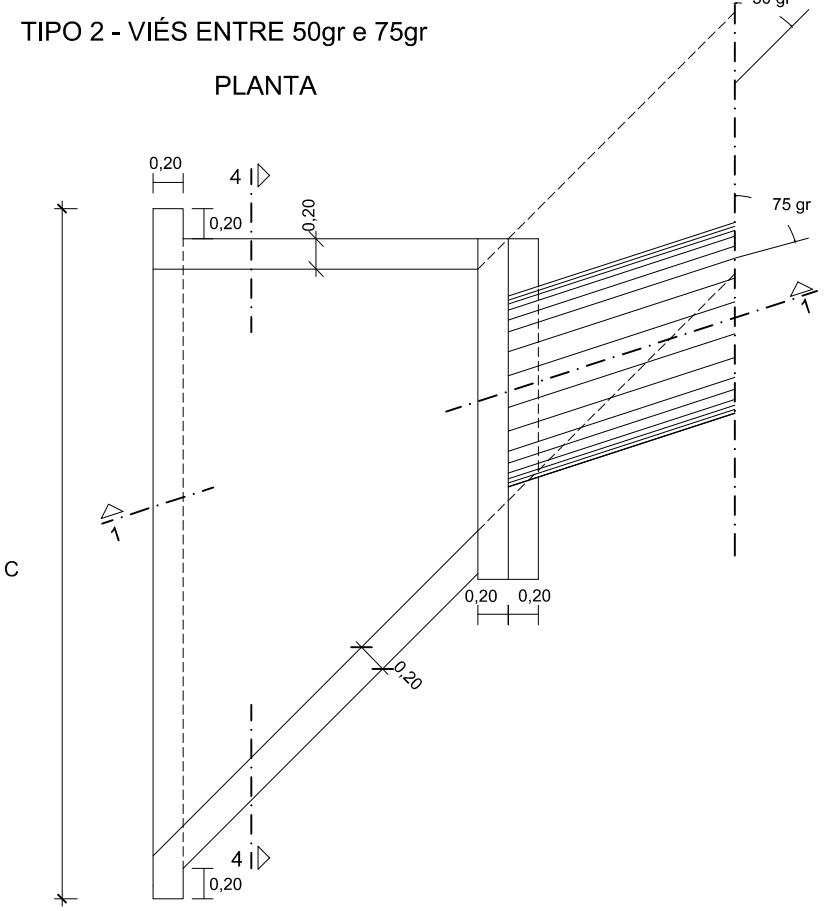


BOCA SIMPLES NA BASE DE ATERRO PARA PASSAGEM
HIDRÁULICA DE SECÇÃO CIRCULAR EM BETÃO

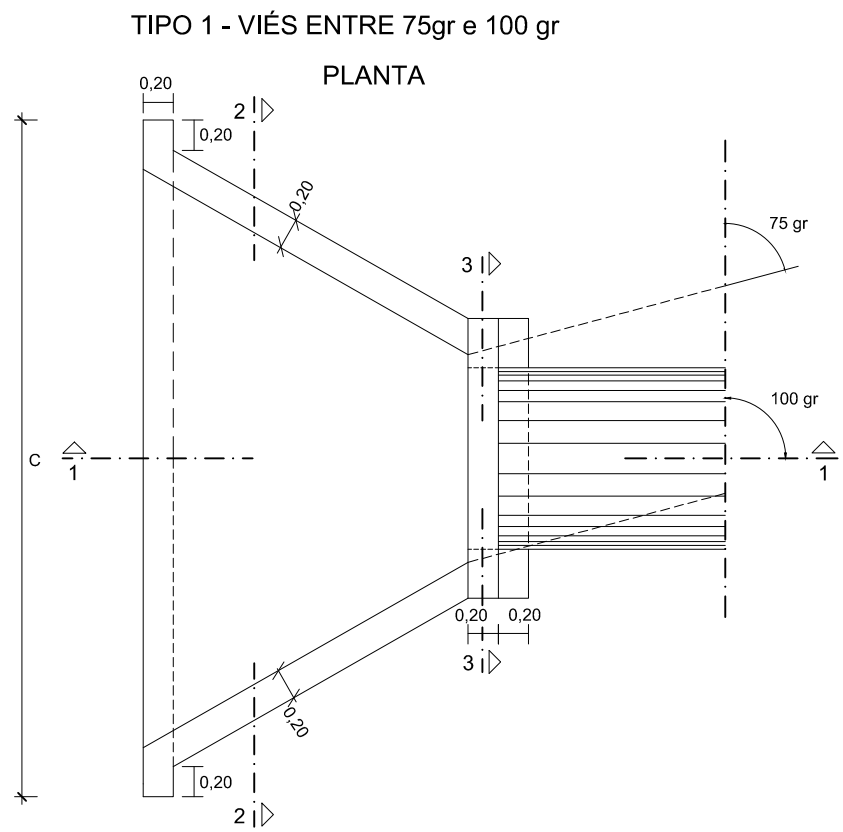

1/n	Ø	A	B	BOCAS TIPO 1		BOCAS TIPO 2	
				C	D	C	D
1/1,5	60	100	17	290	150	270	150
	80	130	17	350	170	320	180
	100	170	17	410	200	380	200
	120	200	17	470	220	430	220
	150	250	17	560	250	510	260
	200	320	17	690	300	640	310
	250	400	17	830	360	770	360
1/2	60	140	20	330	150	300	150
	80	180	20	440	170	360	180
	100	220	20	470	200	430	200
	120	260	20	540	220	500	220
	150	350	20	650	250	600	260
	200	430	20	810	300	740	310
	250	530	20	980	360	900	360

(dimensões em cm)

AS=#Ø8af.0,20 - 0,60<Ø≤1,50
AS=#Ø10af.0,20 - 1,50<Ø≤2,50

MATERIAIS:

- BETÃO DE REGULARIZAÇÃO C12/15
- BETÃO C20/25
- AÇO A 400NL
- RECOBRIMENTO MÍNIMO DE ARMADURAS 0,03m

NOTA:

- DIMENSÕES EM METROS (QUANDO NÃO ESPECIFICADAS)

NV.02.DG042.03 | EN103-VV-P2-401B a 411B.dwg