Rev. 0

03.07.2020

M. Tokola



Altri Caima Constância, Portugal BFB18-00651


3.2.2 Steam capacity

Steam generating capacity with Guarantee Fuel Mixture (Table 1):

		MCR	Min
Steam capacity	kg/s	25	12,5
Operating pressure	bar(a)	90	90
Full superheating range	kg/s	1525	

3.2.3 Combustion diagram

The boiler steam generation capacity and operational range with different fuel moisture contents is presented in the combustion diagram.

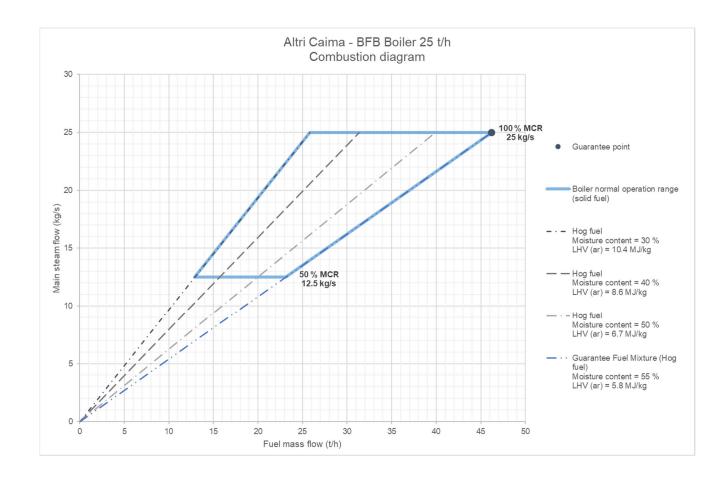

This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to any third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use.